





Biegeanfrage / Demande de cintrage / Bending inquiry
Jansen Profile

Adresse/Société/Adress:

Auftrag/Affaire/Task:

Datum/Date/Date:

Position Repérage Client Position	Form Forme Form A-D	Typ Type Type A-D	Profil/Référence profil/Profile			Radius Aussen Körper Rayon ext. le corp Radius outside profile R	Sehnenlänge Corde Chord length 1	Stichhöhe Flèche Height 2	Schenkellängen Surlongueur Straight legs 3	Menge Quantité Quantity
			A	B	C					

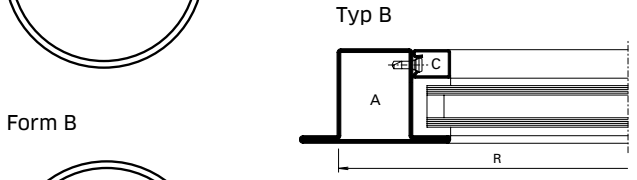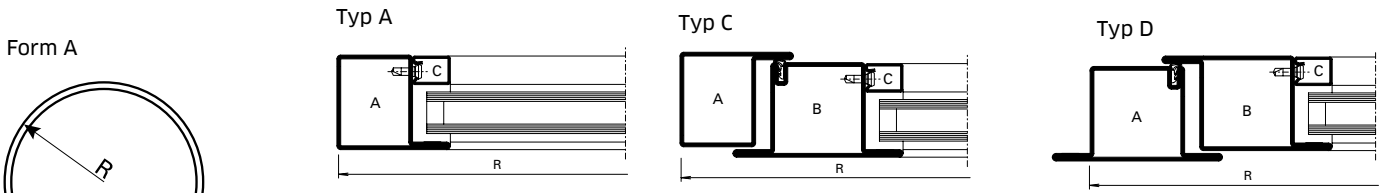

Profil Profilé Profile	Min. Radius Rayon min. Min. radius R	Profil Profilé Profile	Min. Radius Rayon min. Min. radius R	Stahl-Glasleisten Parcloles en acier Steel glazing beads	Min. Radius Rayon min. Min. radius R			
	01.415	300 mm		03.487	600 mm		402.112 Z	500 mm
	01.485	400 mm		03.570	600 mm		402.115 Z	500 mm
	01.487	500 mm		03.635	800 mm		402.120 Z	600 mm
	01.535	350 mm		03.685	1000 mm		402.125 Z	750 mm
	01.565	300 mm					402.130 Z	1000 mm
	01.570	500 mm					402.135 Z	1500 mm
	01.587	1500 mm						
	01.592	1500 mm		06.570	1500 mm			
	01.590	1000 mm						
	01.635	400 mm						
	01.685	600 mm						
	01.740	850 mm						
	01.415	500 mm		30.030	500 mm			
	01.485	600 mm						
	01.487	600 mm						
	01.535	500 mm		30.235	600 mm			
	01.565	500 mm						
	02.415	500 mm		30.265	600 mm			
	02.485	500 mm						
	02.487	600 mm						
	02.535	500 mm						
	02.565	500 mm						
	02.570	600 mm						
	02.635	500 mm		32.042	500 mm			
	02.685	1000 mm						
	02.740	1000 mm						
	02.415	500 mm						
	02.485	500 mm		30.600	500 mm			
	02.487	600 mm		30.620	500 mm			
	02.535	600 mm						
	02.565	600 mm						
	02.570	600 mm						
	02.635	600 mm						
	02.415	500 mm		30.614	300 mm			
	02.485	500 mm						
	02.487	600 mm						
	02.535	600 mm						
	02.565	600 mm						
	02.570	600 mm						
	02.635	600 mm						
	02.415	500 mm						
	02.485	500 mm						
	02.487	600 mm						
	02.535	600 mm						
	02.565	600 mm						
	02.570	600 mm						
	02.635	600 mm						
	02.415	500 mm						
	02.485	500 mm						
	02.487	600 mm						
	02.535	600 mm						
	02.565	600 mm						
	02.570	600 mm						
	02.635	600 mm						